

FIG. 1
(PRIOR ART)

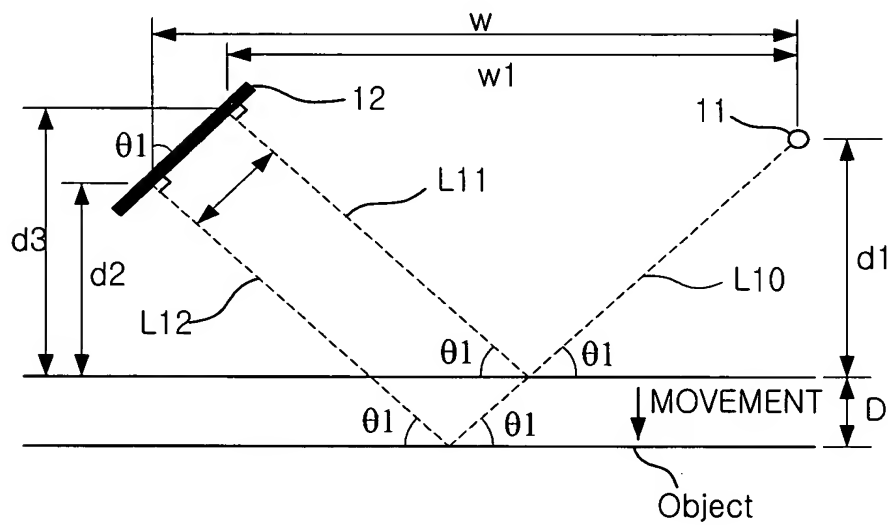


Figure 1 consists of two schematic diagrams illustrating a light guide assembly in two different states. The top diagram shows the assembly in a first state, and the bottom diagram shows it in a second state. Both diagrams include a light source 11, a light guide 100, and a light shield 12. The light guide 100 is shown with a dashed line indicating its internal structure. The light shield 12 is shown with a solid line indicating its position. The light rays are labeled L40, L41, and L42 in the top diagram, and L50, L51, and L52 in the bottom diagram. The dimensions d1, d1', d1, d1', d1, and d3 are indicated.

FIG. 4

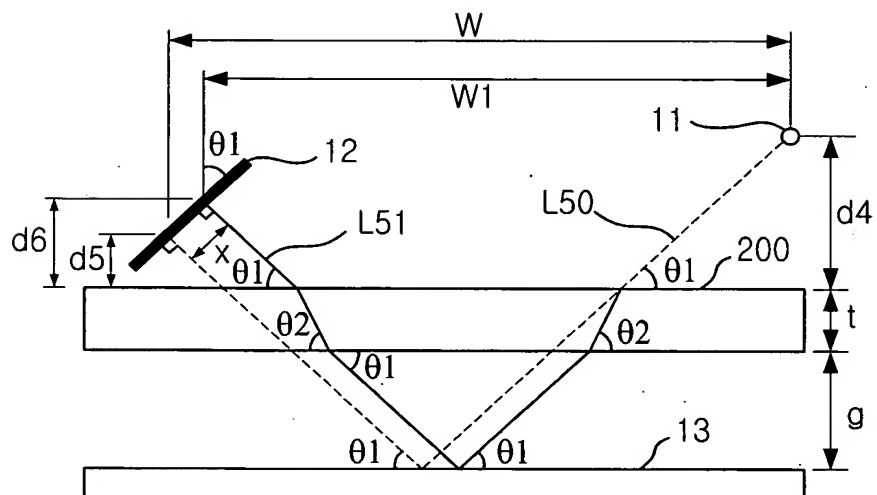
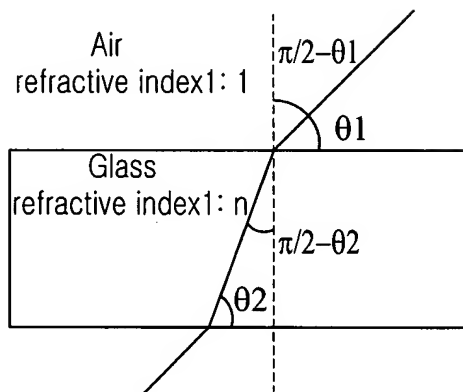


FIG. 5

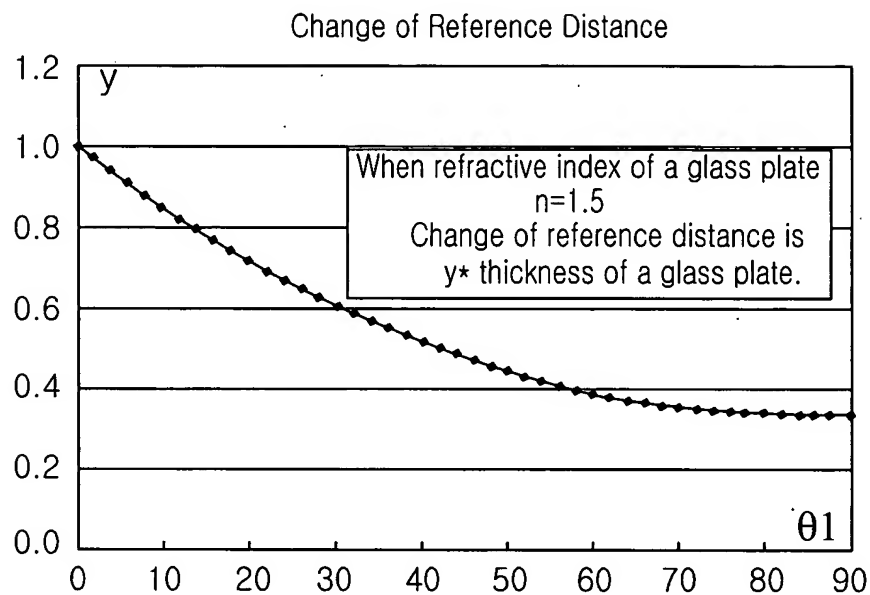


FIG. 6

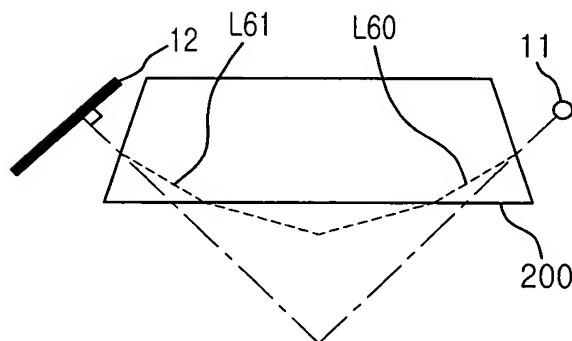


FIG. 7

